

### SPECIFICATIONS





Current Rating: 1.5A  
 Insulation Resistance: 500 MΩ min.  
 Voltage Rating: 125V AC  
 Withstanding Voltage: 1000V AC/minute  
 Temperature Range: -40°C ~ +60°C  
 Contact Resistance: 20 mΩ max.

### FEATURES





Size 2 to 10 contacts  
 Mate with FFC68 modular jack  
 Packaging bag

### MATERIAL

Insulator: PC, UL 94V-2, natural  
 Contact: Copper alloy  
 Plating: Gold over Nickel

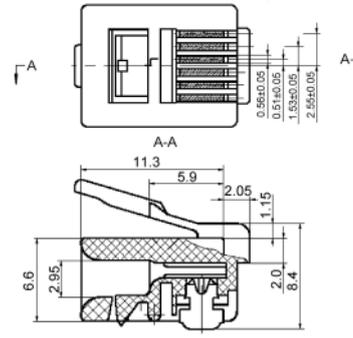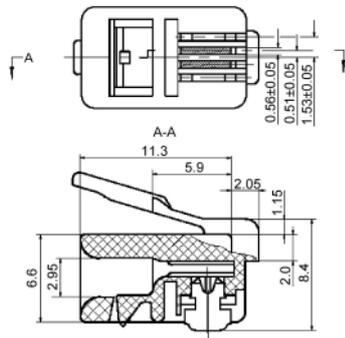


Position	Poles	Part No.
4	2	TA-122-42.06
4	4	TA-122-44.06
6	2	TA-122-62.06
6	4	TA-122-64.06
6	6	TA-122-66.06

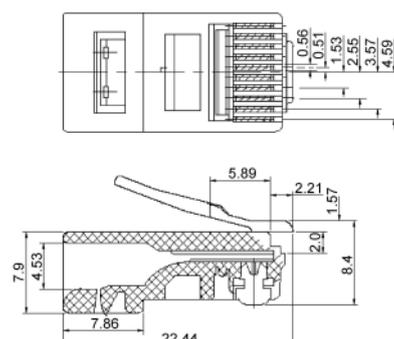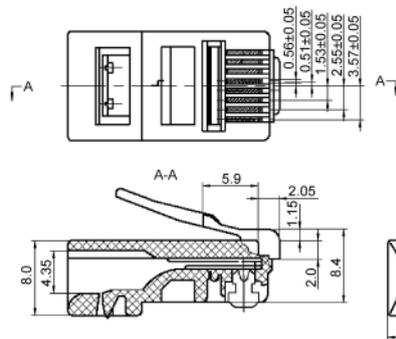

Position	Poles	Part No
8	8	TA-122-88.06
10	10	TA-122-10.06



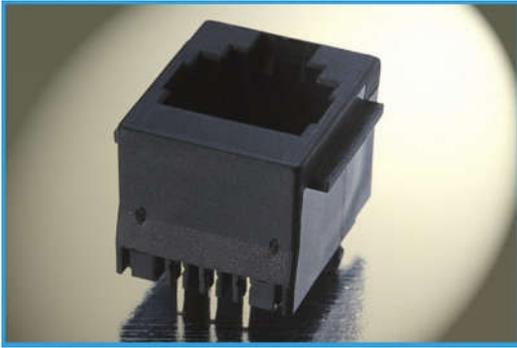

### SPECIFICATIONS




Current Rating: 1.5A  
 Voltage Rating: 125V AC,DC  
 Insulation Resistance: 500 MΩ min.  
 Withstanding Voltage: 500 MΩ min.  
 Temperature Range: -40°C ~ +80°C  
 Contact Resistance: 20 mΩ max.

### FEATURES

Size 4 to 8 poles  
 Suitable for 1,57mm thick PCB  
 Snap-in retention pegs  
 Panel stop  
 Mate with FFC68 modular plugs  
 Packaging tray

### MATERIAL


Insulator: G.F. PBT, UL94V-0  
 Contact: Phosphor bronze  
 Plating: Gold over Nickel

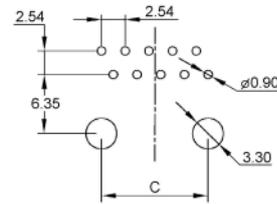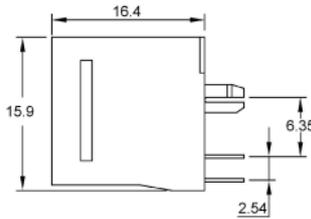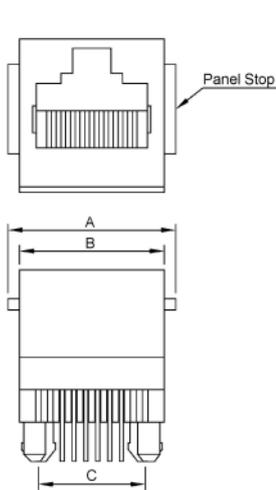

Recommended PCB Layout

Poles	Part. No.	A(mm)	B (mm)	C (mm)
4/4	258-44.06	13,97	11,43	7,62
6/4	258-64.06	15,75	13,46	10,16
6/6	258-66.06	15,75	13,46	10,16
8/8	258-88.06	17,84	15,36	11,43



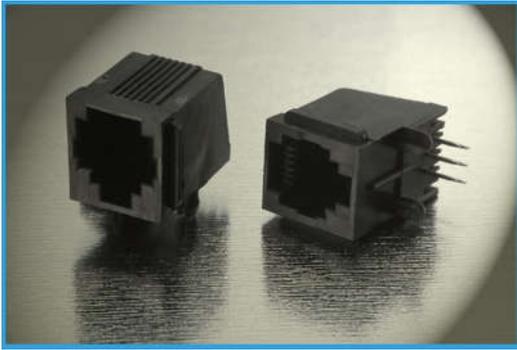

### SPECIFICATIONS




Current Rating: 1.5A  
 Voltage Rating: 125V AC,DC  
 Insulation Resistance: 500 MΩ min.  
 Withstanding Voltage: 1000V AC/minute  
 Temperature Range: -40°C ~ +80°C  
 Contact Resistance: 20 mΩ max.

### MATERIAL

Insulator: G.F. PBT, UL94V-0  
 Contact: Phosphor bronze  
 Plating: Gold over Nickel




### FEATURES

Size 4 to 8 poles  
 Suitable for 1,57mm thick PCB  
 Snap-in retention pegs  
 Panel stop  
 Mate with FFC68 modular plugs  
 Packaging tray

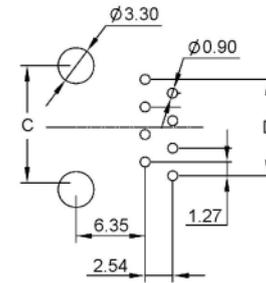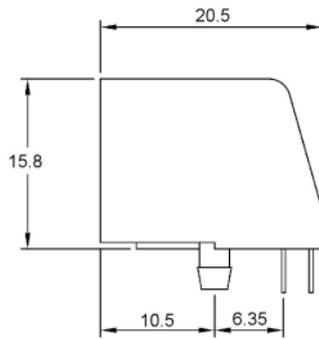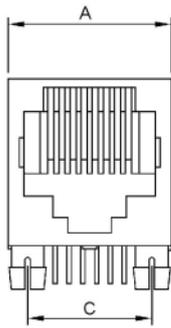

Recommended PCB Layout

Poles	Part. No	A (mm)	C (mm)	D(mm)
4/4	631-44,06	13,72	7,82	3,81
6/4	631-64,06	15,75	10,16	3,81
6/6	631-66,06	15,75	10,16	6,35
8/8	631-88,06	17,78	11,43	8,89

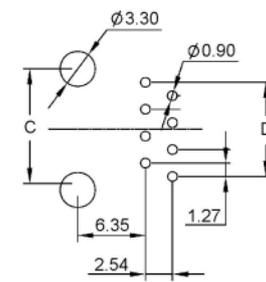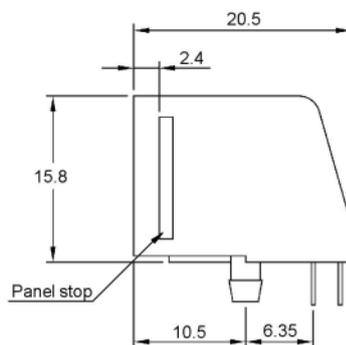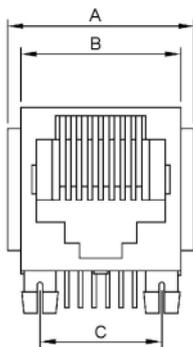


Recommended PCB Layout

Poles	Part. No.	A (mm)	B (mm)	C (mm)	D (mm)
4/4	632-44,06	13,72	11,18	11,18	3,81
6/4	634-64,06	15,75	13,21	13,21	3,81
6/6	632-66,06	15,75	13,21	13,21	6,35
8/8	632-88,06	17,78	15,24	15,24	8,89

# TELEPHONE CONNECTORS

## Modular Jack - syde entry low profile THT

H

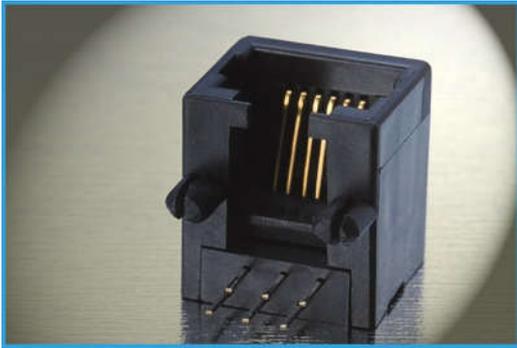

### SPECIFICATIONS




Current Rating: 1.5A  
 Voltage Rating: 125V AC,DC  
 Insulation Resistance: 500 MΩ min.  
 Withstanding Voltage: 1000V AC/minute  
 Temperature Range: -40°C ~ +80°C  
 Contact Resistance: 20 mΩ max.

### FEATURES


Size 4 to 10 poles  
 Suitable for 1,57mm thick PCB  
 Snap-in retention pegs  
 Mate with FFC68 modular plugs  
 Packaging tray

### MATERIAL


Insulator: G.F. PBT, UL94V-0  
 Contact: Phosphor bronze  
 Plating: Selective Gold over Nickel

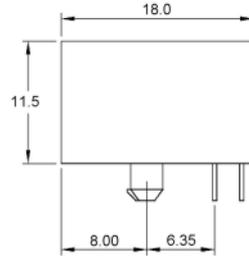

Recommended PCB Layout



Poles	Part. No.	A (mm)	B (mm)	C (mm)
4/4	95001-44.06	11,2	7,82	3,81
6/6	95001-66.06	12,96	13,16	6,35
8/8	95001-88.06	15,03	11,43	8,89
10/0	95001-10.06	15,03	11,43	11,43

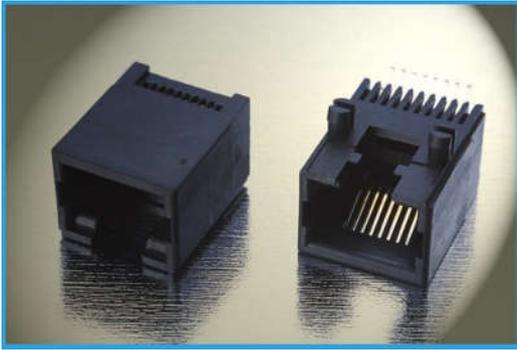

### SPECIFICATIONS




Current Rating: 1.5A  
 Voltage Rating: 125V AC,DC  
 Insulation Resistance: 500 MΩ min.  
 Withstanding Voltage: 1000V AC/minute  
 Temperature Range: -40°C ~ +80°C  
 Contact Resistance: 20 mΩ max.

### FEATURES

Size 4 to 10 poles  
 Suitable for 1,57mm thick PCB  
 Snap-in or solder tab retention pegs  
 Mate with FFC68 modular plugs  
 Packaging tray, option Tape&reel available



### MATERIAL

Insulator: Nylon 6T, UL 94V-0  
 Contact: Phosphor bronze  
 Plating: Selective Gold over Nickel

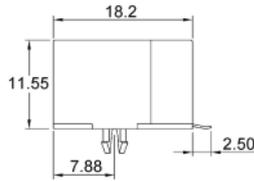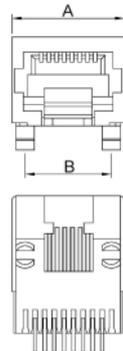

Recommended PCB Layout

Poles	Part. No.	A (mm)	B (mm)	C (mm)
4/4	95001S-44.06	11,27	7,82	3,81
6/6	95001S-66.06	12,96	10,16	6,35
8/8	95001S-88.06	15,03	11,43	8,89
10/0	95001S-10.06	15,03	11,43	11,43

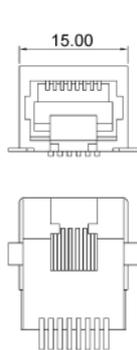

Recommended PCB Layout

Poles	Part. No.
8/8	95001ST-88.06

# TELEPHONE CONNECTORS

## Modular Jack - syde entry low profile, shielded

H



### SPECIFICATIONS


Current Rating: 1.5A  
 Voltage Rating: 125V AC,DC  
 Insulation Resistance: 500 MΩ min.  
 Withstanding Voltage: 1000V AC/minute  
 Temperature Range: -40°C ~ +80°C  
 Contact Resistance: 20 mΩ max.

### FEATURES

Size 6 to 10 poles  
 Suitable for 1,57mm thick PCB  
 Snap-in retention pegs  
 EMI/RFI protection  
 Mate with FFC68 modular plugs  
 Packaging tray, option Tape&reel available


### MATERIALS

Insulator: PBT, UL 94 V-0  
 Contact: Phos. bronze, Selective Gold Plated  
 Shield : Copper alloy, Nickel plated

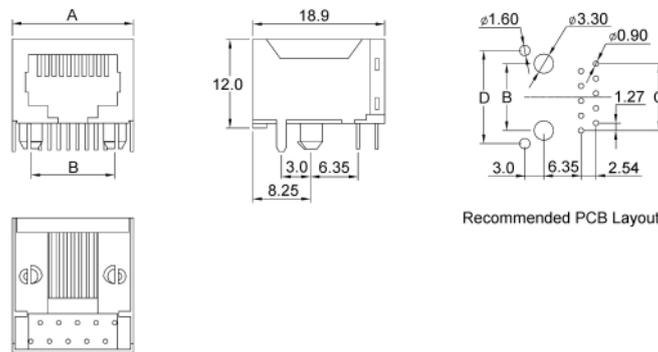


Recommended PCB Layout

Poles	Part. No.	A (mm)	B (mm)	C (mm)	D(mm)
6/6	95002-66.06	13,56	13,16	6,35	13,57
8/8	95002-88.06	15,74	11,43	8,89	15,54
10/10	95002-10,06	15,74	11,43	11,43	15,54

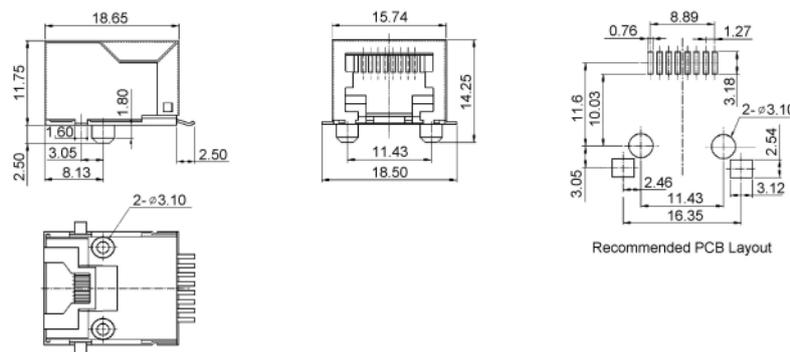

Recommended PCB Layout

Poles	Part. No.
8/8	95002S-88.06

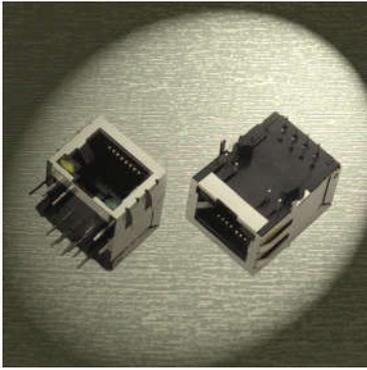

### SPECIFICATIONS




Current Rating: 1.5A  
 Voltage Rating: 125V AC,DC  
 Insulation Resistance: 500 MΩ min.  
 Withstanding Voltage: 1000V AC/minute  
 Temperature Range: -40°C ~ +80°C  
 Contact Resistance: 20 mΩ max.

### FEATURES

Size 8/8 poles  
 Suitable for 1,57mm thick PCB  
 Snap-in retention pegs  
 EMI/RFI protection  
 Mate with FFC68 modular plugs  
 Packaging tray




### MATERIALS

Insulator: PBT , UL 94 V-0  
 Contact: Phos. bronze, Selective Gold Plated  
 Shield : Copper alloy, Nickel plated

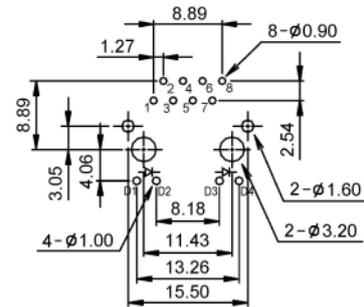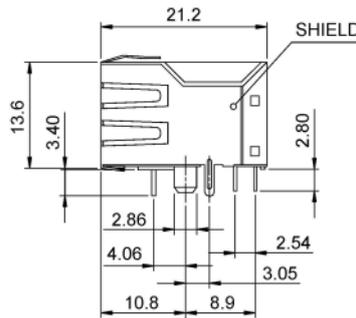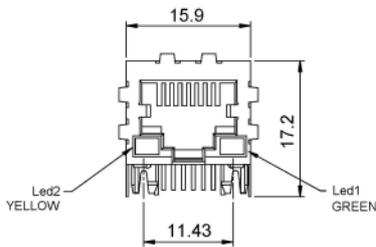

Recommended PCB Layout

Poles	Part. No.	LED color
8/8	95003L-88.06	yellow/green

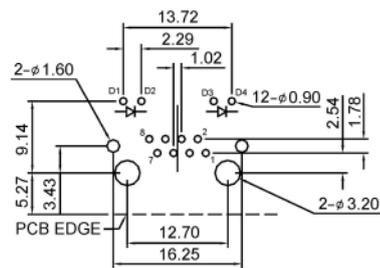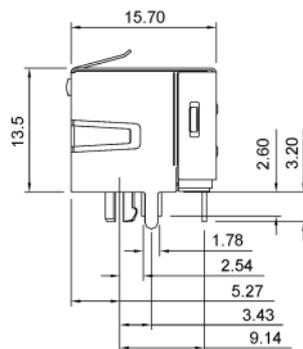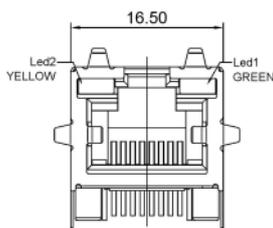

Recommended PCB Layout

Poles	Part. No.	LED color
8/8	95003U-88.06	yellow/green

### RJ45 PVC BOOT

- Protect network cable during extreme use
- Cover the RJ45 modular plug and the retention clip
- Available in different colors for wiring identification
- Made of soft PVC



### RJ45 DUST COVER

- Protect jacks from dust and dirt
- Protect jacks from physical damage
- Ensure long lasting connections
- Available with black or white plastic insulator
- Suitable for RJ45 modular jacks

